



Ruud Philosophy of Reliability


Designed to keep your family comfortable for years to come, Ruud® products are developed using the 360°+1 design philosophy. The Ruud brand strives to deliver the very best homeowner experience by evaluating every detail of the product from every angle. That's 360°+1. And that's why you can rely on Ruud's heat pump and air handler to bring you and your family years of comfort.



SOUND & SPACE
CONSTRAINT SOLUTIONS
RP17**H /
RHMV*****N

Optional Accessories

Type	Accessory Name	Model Number
Thermostat	❶ Wired Controller	RXRNRUZ*2
	❷ Simple Controller¹	RXRSRY²
Converter	❸ Thermostat Converter	RXTTRX
Wireless Remote Controller	❹ IR Receiver Kit with Wireless Remote Controller	RXLBTUM

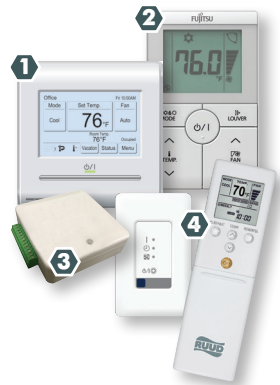

How to Speak Heating & Cooling

Variable Speed System

Operates at all levels, making ongoing adjustments to maximize comfort, saving the most energy during peak and non-peak heating and cooling demands.

SEER

Seasonal Energy Efficiency Rating (SEER) is used to express the efficiency of an air conditioning unit, or a heat pump in cooling mode. The higher the SEER rating, the more efficient the unit.

EER

Energy Efficiency Ratio (EER) is the cooling capacity of the air conditioner in BTUs per hour to the total electrical input in watts. This measure is determined by comparing test units to the Air Conditioning and Refrigeration Institute specifications.

HSPF

Heating Seasonal Performance Factor (HSPF) is used to express the efficiency of heat pumps. The higher the HSPF, the more efficient the unit.

System Benefits At-A-Glance

Cooling Efficiency:

19 SEER / 12 EER

Heating Efficiency:

10.7 HSPF

Outdoor Sound Level:

Levels as low as 53 dB(A) contribute to extremely quieter operation than conventional HVAC systems

Heat Pump Compressor:

Variable-speed, inverter-driven rotary compressor

Air Handler Motor:

Constant CFM variable speed modulating airflow

Air Handler Evaporator Coil:

All-aluminum

Optional Electric Heat²:

Thermostat (Model No. RXRSRY or RXRNRUZ*) required as a tool to configure electric heat

Limited Warranty¹:

Parts—10-year



RUUD HEATING, COOLING & WATER HEATING

As the only brand bringing innovative air and water solutions to homes and businesses around the world, Ruud continues to deliver advanced comfort, savings and experiences to our customers—just as we've done for over 100 years.

To learn more about Ruud products, including the Ruud line of Integrated Home Comfort Solutions, visit **Ruud.com**.



Ruud USA
5600 Old Greenwood Road
Fort Smith, Arkansas 72908




Ruud Canada
125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.

Ruud.com

**TODAY'S FORECAST:
QUIET COMFORT**

The Ruud® Achiever Plus® Side-Discharge Heat Pump & Multi-Position Air Handler offers a **Sound & Space Constraint Solution** that provides system options for installations with tight space requirements and/or outdoor sound regulations with the solid technology and energy-saving performance you've come to expect from Ruud.

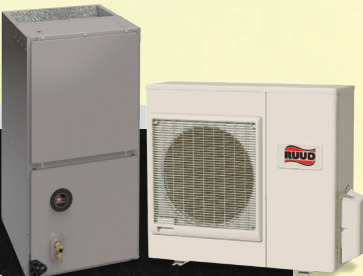

**ACHIEVER PLUS
SERIES SYSTEM**

Heat Pump Model RP17**H
Air Handler Model RHMV*****N
Cooling Efficiencies: 19 SEER / 12 EER
Heating Efficiencies: 10.7 HSPF

Highly Energy Efficient, Variable Speed Inverter Technology

With variable speed inverter technology, you can rely on your system to quickly and consistently adapt to your heating and cooling needs, regardless of the conditions outside.

Exceptional Quality & Reliability

The Achiever Plus Series includes features that help fight corrosion, reduce leaks and enhance the overall strength of your system. The air handler and heat pump are both backed by a 10-year limited parts warranty¹.

Ideal for Applications with Space Constraints

The Side-Discharge Heat Pump allows for flexible installation in tight outdoor spaces, while the indoor 3-Way Multi-Position Air Handler provides multiple configuration options.

Quiet Operation

Whether noise control is a requirement or not, we've got you covered. With the excellent sound insulation on the air handler, along with the streamlined airflow the heat pump provides, your system will provide the peace and quiet you want, regardless of the reason why.

YOUR LOCAL RUUD CONTRACTOR

¹For complete details of the limited and conditional warranties, including applicable terms and conditions, contact your local contractor. ²Thermostat (Model No. RXRSRY or RXRNRUZ*) required as a tool to configure electric heat and other function codes.



RELY ON RUUD.™



A Sound & Space Constraint Solution for application challenges including, but not limited to: condominiums, zero lot-line boundaries, multi-family housing, rooftop terraces and balconies, and those with acoustic requirements.




condominiums



zero lot-line boundaries



multi-family housing



rooftop terraces



acoustic requirements

A Sound & Space Constraint Solution

Optimal, Energy Efficient Comfort Year-Round

The variable speed, inverter technology on the Ruud® *Achiever Plus*® Series RP17**H Heat Pump provides just the right amount of heating and cooling under all conditions for dependable comfort and energy savings year-round.

Also, the Ruud RHMV*****N Air Handler features a high-efficiency, constant CFM, variable-speed motor with modulating airflow—the heart of the air handler. When the unit is matched with the RP17**H Heat Pump, it is able to run at speeds that match the requirements of the home.. This provides even temperatures so there is no need to continuously adjust your thermostat, reducing your energy usage.

Humidity Control

The air handler manages humidity levels in the home, improving your comfort and helping you save money on energy bills. The factory-installed variable speed blower motor within the air handler cabinet, is a key component for your system. Superior humidity control, improved system performance, and the high-quality standards used in manufacturing, ensures a long-lasting, dependable performance.

Space-Saver Solution

The Ruud *Achiever Plus* Series Side-Discharge Heat Pump & Multi-Position Air Handler system offers a solution to space constraints. The Side Discharge Heat Pump allows for flexible installation in tight outdoor spaces with a minimum clearance of only 21" on 3-sides, while the 3-Way Multi-Position Air Handler provides multiple indoor configuration options.

Quiet Operation Inside & Out

The Ruud RHMV*****N Air Handler is designed with a sturdy steel cabinet with 1" of foil-faced insulation, offering excellent thermal and sound insulation to keep your indoor environment nice and quiet. By adjusting to comfort requirement and running at lower speeds throughout the day, the RP17**H Heat Pump is able to streamline airflow and reduce vibration, allowing for a much quieter outdoor operation than conventional outdoor units down to 53 dB(A).



Indoor unit model				RHMV2421MNACJA	RHMV3021SNACJA	RHMV3621MNACJA	RHMV4821SNACJA
Outdoor unit model				RP1724HJVXA	RP1730HJVXA	RP1736HJVXA	RP1748HJVXA
Power supply				Single-phase 208/230V 60Hz			
Available voltage range				187–253V			
Static pressure range				0.1–1.0 inWG			
Cooling character	Rated	Capacity	BTU/h	24,000	30,000	36,000	45,600
		Power consumption	kW	2.00	2.97	3.18	5.56
		EER	BTU/hW	12.00	10.10	11.30	8.20
	SEER		BTU/hW	19.00	18.50	18.00	17.00
	Operating current		A	8.80	13.00	14.00	24.40
	Max operating current		A	15.60		32.40	
	Capacity range		BTU/h	5,400–29,000	9,600–35,000	13,000–38,000	13,000–48,000
	Noise level	Indoor unit [H/M/L/Q]	dB(A)	40/34/32/26	42/37/33/28	41/30/27/24	48/36/31/25
Outdoor unit		dB(A)	53		53	54	
Heating character	Rated	Capacity	BTU/h	27,000	32,000	42,000	53,000
		Power consumption	kW	2.48	3.02	3.82	5.35
		COP	BTU/hW	10.90	10.60	11.00	9.90
	HSPF		BTU/hW	10.70	10.30	10.20	
	Operating current		A	10.90	13.30	16.80	23.50
	Max operating current		A	16.10		32.40	
	Capacity range		BTU/h	5,400–32,400	9,200–39,000	11,000–52,000	11,000–54,000
	Noise level	Indoor unit [H/M/L/Q]	dB(A)	37/33/31/25	39/36/32/25	40/35/28/26	47/37/32/29
Outdoor unit		dB(A)	55		54	55	
Indoor unit	Net dimensions	Height	in.	42-1/2		57	
			mm	1,080		1,448	
		Width	in.	21		21	
			mm	533		533	
		Depth	in.	21-11/16		21-11/16	
			mm	551		551	
	Gross dimensions	Height	in.	42-12/16		57-2/16	
			mm	1,086		1,451	
		Width	in.	24		23	
			mm	610		584	
		Depth	in.	25-5/16		26-8/16	
			mm	643		673	
	Weight	Net	lbs.	104		132	
			kg	47		60	
Gross		lbs.	116		146		
		kg	52.5		66		
Stack			boxes	4		3	
Outdoor unit	Net dimensions	Height	in.	32-11/16		39-5/16	
			mm	830		998	
		Width	in.	35-7/16		38-3/16	
			mm	900		970	
		Depth	in.	13		14-9/16	
			mm	330		370	
	Gross dimensions	Height	in.	39-3/8		45-12/16	
			mm	1,000		1,162	
		Width	in.	41-5/16		41-14/16	
			mm	1,050		1,064	
		Depth	in.	17-1/2		18-13/16	
			mm	445		478	
	Weight	Net	lbs.	134		198	
			kg	61		90	
Gross		lbs.	152		220		
		kg	69		100		
Stack			boxes	5		3	
	Refrigerant	Type		R410A			
		Charge	lbs. oz.	4 lb. 10.1 oz.		9 lbs. 8 oz.	
			kg	2.10		4.30	
Installation	Connection pipe	Connection method		Flare			
		Liquid pipe diameter	in.	3/8			
			mm	9.52			
		Gas pipe diameter	in.	5/8			
			mm	15.88			